



TG18-DISTANCE

SANGAN gasfilled model TG18 series thermometer is available as 100/160 mm. These gasfilled thermometers are suitable for corrosive media and environments in chemical process, petroleum and food industries and meet the highest standards of measurement technique and are used when temperature must be measured remotely. The standard connection on these thermometers is an adjustable fitting in order to give more flexibility to stem length immersions.

stainless steel gasfilled capillary thermometer

mounting variations

- type A bottom connection, direct mounting
- type C surface mounting, bottom connection
- type D back connection, direct mounting
- type E panel mounting, back connection
- type F panel mounting, bottom connection
- type TGE every angle connection, direct mounting

technical specification model TG18-distance

diameter 100/160 mm	dial aluminium	window glass	ranges from -80/650 °C
casing AISI304 bayonet	stem AISI316	element elastic spring	connection 1/2" bsp adjustable
bezel AISI304 bayonet	stem dia 12 mm	pointer adjustable micro	accuracy 1.0% FSD

Note:stainless steel capillary is available with or without armoring

options and special executions at extra cost

casing	AISI316
bezel	AISI316
window	safety glass
dials	customized -i.e., non standard ranges or logos
certificates	calibration-; conformity-; material
manuals	installation and maintenance
connection	NPT, MM, BSPT, acc JIS in various sizes
connection type	without connection
connection position	top or side
drag-pointer system	for dia 100/160 mm (plastic window only, max 160 °C)
red pointer	on dial
filling	glycerine, silicone, fluorolube up to 160 °C
stem diameters	1/4" / 3/8" / 1/2" / 6 mm / 8 mm / 10 mm
separate wells	see index 2.3.
capillary	standard with 2 meter length and armoring

TG18-DISTANCE - technical data sheet

operating details

working range

	limitations
Permanent	measuring range per DIN13 190
Short time (≤ 1 h)	1,2 x measuring range up to 500 °C
	1,1 x measuring range beyond 500 °C

temperature limitations

	ambient	process
without filling	-40 °C to 60 °C	-80 °C to 650 °C
glycerine filling	-25 °C to 60 °C	15 °C to 80 °C
silicone filling	-40 °C to 60 °C	-45 °C to 250 °C

pressure rating of stem

25 bar maximum (without termowell)

design information

ingress protection


IP 54 per EN 60 529 / IEC 529

IP 65 per EN 60 529 / IEC 529 (liquid filling only)

design

DIN 13 190

drawings

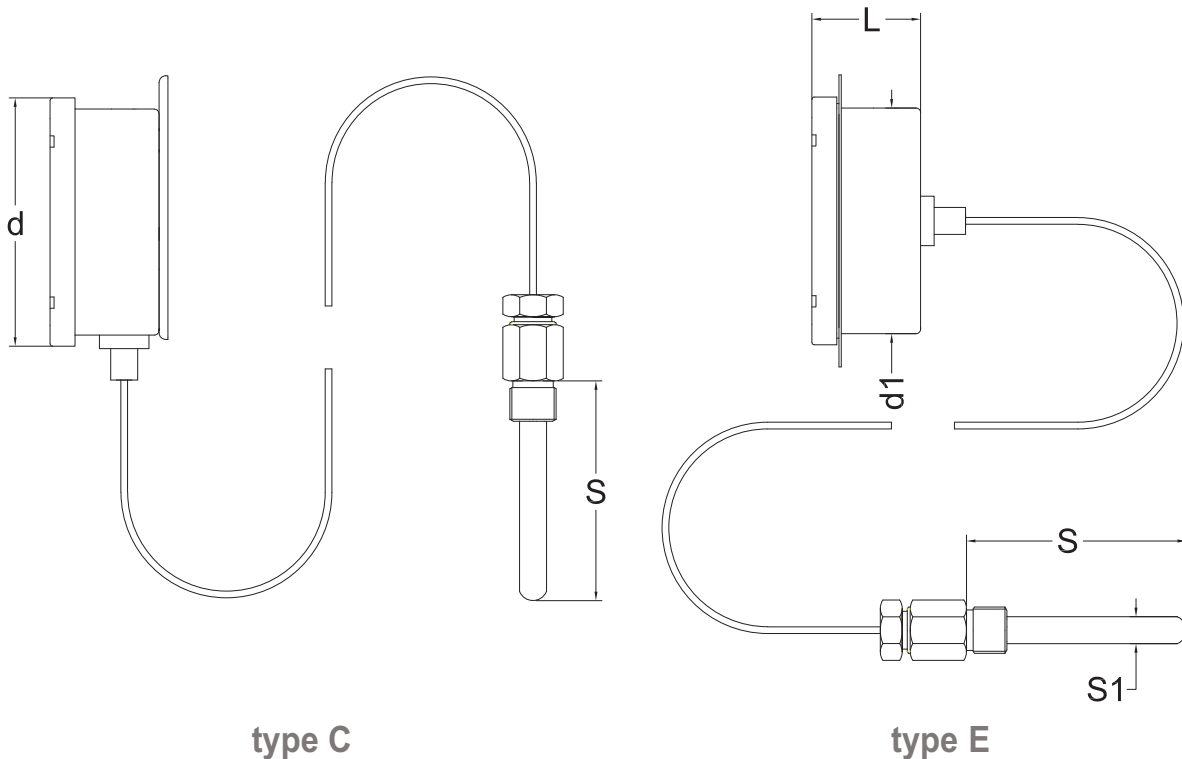

type C

type E

dimensions

ns	d	d1	L	S	S1	-	-
100	110	100	49	to specify	12	-	-
160	160	149	50	to specify	12	-	-

Note : dimensions are in mm